

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan


“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”


IS 6598 (1972): Cellular concrete for thermal insulation
[CHD 27: Thermal Insulation]

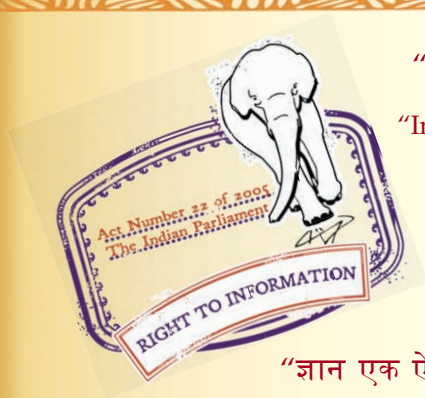

“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”

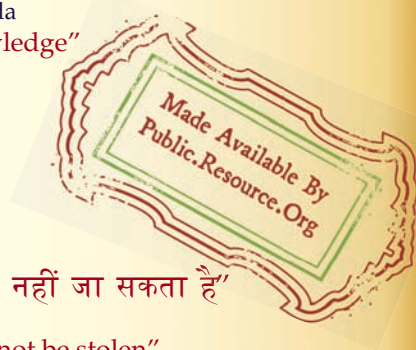

“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



IS : 6598 - 1972
(Reaffirmed 2010)

Indian Standard

SPECIFICATION FOR CELLULAR CONCRETE FOR THERMAL INSULATION

Third Reprint AUGUST 2006
(Including Amendment No. 1 & 2)

UDC 662.998 : 666.973.6

© Copyright 1972

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

AMENDMENT NO. 2 AUGUST 2000
TO
IS 6598 : 1972 SPECIFICATION FOR CELLULAR
CONCRETE FOR THERMAL INSULATION

[Page 4, clause 4.2 (see also Amendment No. 1)]— Substitute the following for the existing clause:

'4.2 Density — The average bulk density of the material shall be as given below when tested in accordance with the method prescribed in 4 of IS 5688 : 1982t:

<i>Grade</i>	<i>Density, kg/m³</i>
A	Minimum 320
B	321 to 400
C	401 to 500'

(Page 4, footnote marked †) — Substitute the following for the existing footnote:

†Methods of test for preformed block-type and pipe covering type thermal insulation (*first revision*).'

[Page 5, clause 4.3 (see also Amendment No. 1, line 3)] — Substitute '5688 : 1982*' for 'IS : 5688 - 1970*'.

(Page 5, footnote marked '*') — Substitute the following for the existing footnote:

*Methods of test for preformed block-type and pipe covering type thermal insulation (*first revision*).'

(CHD 27)

AMENDMENT NO. 1 AUGUST 1981
TO
IS :6598-1972 SPECIFICATION FOR CELLULAR
CONCRETE FOR THERMAL INSULATION

Alterations

(Page 4, clause 4.2) - Substitute the following for the existing clause:

4.2 Density - The average bulk density of the three grades of the material shall be as given below when tested in accordance with the method prescribed in 4 of IS :5688-1970†:

<i>Grade</i>	<i>Density, kg/m³</i>
A	Up to 320
B	321 to 400
C	401 to 500

(Page 5, clause 4.3) - Substitute the following for the existing clause:

4.3 Crushing Strength - The crushing strength of dry cellular concrete shall be as given below when tested in accordance with the method prescribed in 6 of IS:5688-1970*.

<i>Grade</i>	<i>strength, Min, kg/cm²</i>	
	<i>Type 1</i>	<i>Type 2</i>
A	7.0	2.5
B	12.0	4.5
C	20.0	8.0

(CDC 37)

Indian Standard

SPECIFICATION FOR CELLULAR CONCRETE FOR THERMAL INSULATION

Thermal Insulation Materials Sectional Committee, CDC 37

<i>Chairman</i>	<i>Representing</i>
SHRI T. D. BANSAL	National Physical Laboratory (CSIR), New Delhi
<i>Members</i>	
SHRI M. BALA SUBRAMANIAM	BASF India Ltd, Bombay
DR B. K. BANERJEE	Fertilizer Corporation of India Ltd, New Delhi
DR H. C. ROY (<i>Alternate</i>)	
SHRI M. B. L. BHATNAGAR	Insulation Manufacturers', Distributors' and Contractors' Association Ltd, Bombay
SHRI A. K. CHATTERJI	Central Building Research Institute (CSIR), Roorkee
DR K. R. RAO (<i>Alternate</i>)	
CHEMIST & METALLURGIST	-II, Railway Board (Ministry of Railways)
RDSO, LUCKNOW	
SHRI M. H. GAJENDRADKAR	Hindustan Steel Ltd, Ranchi
SHRI S. K. MUKHERJEE (<i>Alternate</i>)	
SHRI G. K. KABRA	Hyderabad Allwyn Metal Works Ltd, Hyderabad
SHRI S. R. KHANNA	Directorate General of Technical Development, New Delhi
SHRI R. PARIKSHIT (<i>Alternate</i>)	
SHRI M. G. KUTTY	Hindustan Shipyard Ltd, Visakhapatnam
SHRI K. B. MISTRY (<i>Alternate</i>)	
SHRI S. K. NAYAK	Indian Oil Corporation Ltd (Refineries and Pipe- line Division), New Delhi
SHRI J. D. CHOUDHURY (<i>Alternate</i>)	
SHRI R. P. PUNJ	Punj Sons Private Ltd, New Delhi
SHRI Y. P. PUNJ (<i>Alternate</i>)	
DR B. C. RAYCKAUDHURI	Central Mechanical Engineering Research Institute (CSIR), Durgapur
SHRI S. B. SARBAR	Ministry of Petroleum and Chemicals & Mines and Metals, New Delhi
SHRI N. R. SAWHNEY	National Insulation Manufacturers' Association, New Delhi
SHRI B. L. SEN	Indian Oxygen Ltd, Calcutta
SHRI D. S. MADAM (<i>Alternate</i>)	
DR S. P. SUKHATME	Indian Institute of Technology, Bombay
SHRI V. A. SURA	Newkem Products Corporation, Bombay
SHRI P. K. AMIN (<i>Alternate</i>)	

(Continued on page 2)

**BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002**

IS : 6598 - 1972

(Continued from page 1)

Member

DR A. VASUDEV

SHRI A. SKARIF (*Alternate*)

SHRI D. DAS GUPTA,
Director (Chem)

Representing

Fibreglass Pilkington Ltd, Bombay

Director General, ISI (*Ex-officio Member*)

Secretary

SHRI P. S. ARORA

Assistant Director (Chem), ISI

Panel for Cast and Moulded Thermal Insulation Products, CDC 37 : P4

Convener

SHRI N. K. D. CHOUDHURY

Central Building Research Institute (CSIR),
Roorkee

Member

SHRI B. CHATTERJEE

Fertilizer Corporation of India Ltd, New Delhi

DR H. C. ROY (*Alternate*)

SHRI C. L. KASLIVTAL

Hindustan Housing Factory Ltd, New Delhi

SHRI V. A. SURA

Newkem Products Corporation, Bombay

Indian Standard

SPECIFICATION FOR CELLULAR CONCRETE FOR THERMAL INSULATION

0. FOREWORD

0.1 This Indian Standard was adopted by the Indian Standards Institution on 30 June 1972, after the draft finalized by the Thermal Insulation Materials Sectional Committee had been approved by the Chemical Division Council.

0.2 Cellular concrete is a versatile thermal insulation material on account of its light weight and high thermal insulation. Its versatility is due to its resistance to sulphate action, resistance to alternate cooling and thawing (when high pressure steam cured) and due to its resistance to penetration of water.

0.3 When cast *in-situ*, it can be applied over flat roofs as thermal insulation material.

0.4 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS: 2-1960*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

1. SCOPE

1.1 This standard prescribes the requirements and the methods of sampling and test for cellular concrete for thermal insulation.

2. TYPES AND GRADES

2.1 Types — There shall be two types of the material depending on the manner of manufacture, namely:

Type 1 — High pressure steam cured (autoclaved) material in the form of precast blocks.

*Rules for rounding off numerical values (*revision*).

IS : 16598 - 1972

Type 2 — Materials cured under natural conditions (that is, under ambient pressure and temperature) by water. The material may be either cast *in-situ* or may be in the form of precast blocks.

2.2 Grades — Each of these two types of the material shall have three grades, namely:

Grade A — Light weight cellular concrete;

Grade B — Medium weight cellular concrete; and

Grade C — Heavy weight cellular concrete.

3. MATERIALS

3.1 Aggregate — A variety of silicious fines, such as ground quartz, sand, shale, fly ash and granulated slag may be used in the manufacture of cellular concrete.

3.2 Binders — Portland cement conforming to IS : 269-1967* or lime shall be used.

3.3 Gassing Agents — Organic foaming agents based on resin soap, glue, surface active agents, or fine aluminium powder, zinc, dust, calcium carbide, calcium hypochlorite, etc, may be used for gassing the concrete.

3.4 Water — The water used for making the concrete shall be clean and free from any matter injurious to the durability of cellular concrete.

4. REQUIREMENTS

4.1 Description — Cellular concrete is a light weight concrete formed by producing gas or air bubbles in a cement slurry or a cement-sand slurry.

4.2 Density — The average bulk density of the three grades of the material shall be as given below when tested in accordance with the method prescribed in 4 of IS : 5688-1970†:

<i>Grade</i>	<i>Density</i>
A	Up to 300 kg/m ³
B	301 to 400 kg/m ³
C	401 to 500 kg/m ³

* Specification for ordinary, rapid-hardening and low heat Portland cement (*second revision*).

†Method of test for preformed block-type and pipe covering-type thermal insulation.

4.3 Crushing Strength — The crushing strength of dry cellular concrete shall be as given below when tested in accordance with the method as prescribed in 6 of IS : 5688-1970*:

Grade	Strength, kg/cm ² [^]	
	Type 1	Type 2
A	7.0	4.5
B	12	6.0
C	20	9.0

4.4 Capillary Absorption — The capillary absorption shall not exceed 20 percent in case of Type 1 cellular concrete when tested in accordance with the method prescribed in Appendix A.

4.5 Thermal Conductivity — The thermal conductivity of the material shall be as given below when determined in accordance with the method prescribed in IS : 3346-1966†:

Grade	Thermal Conductivity in mW/cm deg at 50°C Mean Temperature, Max
A	0.7
B	0.85
C	1.0

4.6 Dimensions — The dimensions of the Type 1 and Type 2 precast cellular concrete blocks shall be either 50 or 60 cm in length; 20, 25 or 30 cm in width; and 7.5, 10, 15, 25 or 40 cm in thickness.

4.6.1 A tolerance of ± 3 percent shall be allowed on width and height and ± 1 percent on thickness.

5. MARKING

5.1 Each block shall be marked with the manufacturer's identification mark or initials and the type and grade of the material.

5.1.1 The product may also be marked with Standard Mark.

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The details of conditions under which the licence for the use of Standard Mark may be granted to manufactures or producers may be obtained from the Bureau of Indian Standards.

*Methods of test for preformed block-type and pipe-covering type thermal insulation.

†Method for the determination of thermal conductivity of thermal insulation materials (two slab, guarded hot-plate method).

IS : 6598 - 1972

6. SAMPLING

6.1 The method of sampling shall be as prescribed in Appendix B.

APPENDIX A *(Clause 4.4)*

CAPILLARY ABSORPTION TEST

A.1. TEST SPECIMENS

A-1.1 Three test specimens 4×4 cm base and 16 cm height shall be prepared.

A.2. PROCEDURE

A-2.1 Dry the specimens in an oven at $105 \pm 5^\circ\text{C}$ and weigh them. Place them on their bases in a water-bath with the water level 1 cm above the base of the specimen. The specimen shall be weighed a few times during the test. Allow them to stand for 48 hours in the water and determine their masses.

A-3. CALCULATION

$$\text{Capillary absorption, percent by mass} = \frac{w}{W} \times 100$$

where

w = increase in mass in g of the specimen, and

W = mass in g of the specimen after drying.

APPENDIX B *(Clause 6.1)*

SAMPLING OP CELLULAR CONCRETE BLOCKS

B-1 LOT

B-1.1 In a consignment, cellular concrete of the same type and grade and manufactured approximately in the same period shall be grouped to form a lot. If it is in the form of blocks, a lot shall be made up of not more

than 1 000 blocks. If the material is *in.silu*, not more than 10 tonnes of material shall constitute a lot. If the material is transported in lorries and received as such, the material in a lorry (or vehicle) load may conveniently be termed as a lot.

B.2. SCALE OF SAMPLING

B-2.1 Each lot shall be tested for all the requirements of this specification.

B-2.2 If the material is received in bulk, samples shall be drawn from different portions so as to be representative of the lot. It is recommended that at least 20 increments, each weighing about 1 kg be taken from the bulk and kept for conducting various tests.

B-2.3 If the lot is made up of precast blocks, the number of blocks to be sampled depends upon the size of the lot and shall be in accordance with col 1 and 2 of Table 1.

B-2.3.1 The sample blocks shall be selected at random with the help of random number tables. For guidance IS : 4905-1968* may be referred.

TABLE 1 SCALE OF SAMPLING FOR CELLULAR CONCRETE BLOCKS

(Clause B-2.3)

LOT SIZE	SAMPLE SIZE (BLOCKS TO BE SAMPLED)	PERMISSIBLE NO. OF DEFECTIVES (VISUAL AND DIMENSIONAL REQUIREMENTS)
<i>N</i>	<i>n</i>	<i>a</i>
(1)	(2)	(3)
Up to 100	5	0
101 to 300	8	0
301 „ 500	13	0
501 „ 1 000	20	1

B.3. NUMBER OF TESTS AND CRITERIA FOR CONFORMITY

B-3.1 Visual and Dimensional Requirements — In respect of visual and dimensional characteristics (4.6), the sample blocks selected according to B-2 shall be examined. The lot shall be accepted only if the number of defective blocks in the sample does not exceed the permissible number (*a*) given in col 3 of Table 1.

B-3.2 Preparation of Samples for Other Tests — In case of the material in bulk form, the increments shall be grouped into four portions

*Methods for random sampling.

IS : 6598 - 1972

and the material in each portion shall be combined thoroughly to give a test sample. There will thus be four test samples to be used for different tests. In the case of precast blocks four test samples shall be prepared from the sample blocks selected under **B-2**.

B-3.3 Density and Crushing Strength — Four tests shall be conducted for each of the two characteristics on test samples or blocks mentioned in **B-3.2**. No failure shall occur if the lot is to be accepted.

B-3.4 Thermal Cenductivity — One test shall be conducted for this characteristics on test samples prepared under **B-3.2**. The test shall not fail for acceptance of the lot.

B-3.5 Capillary Absorption — One test shall be conducted on any one of the test samples and the lot shall be accepted if the test result complies with the requirement in **4.4**.

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 23230131, 23233375, 23239402 **Fax:** 91+011 23234062, 23239399, 23239332

E-mail: bis@vsnl.com

website: <http://www.bis.org.in>

Central Laboratory:

Plot No. 20/9, Site IV, Sahibabad Industrial Area. SAHIBABD 201010

Telephone

2770032

Regional Offices:

Central: Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

23237617

*Eastern: 1/14 CIT Scheme VII M, V.I.P. Road Kankurgachi, KOLKATA 700054

23378662

Northern: SCO 335-336, Sector 34-A, Chandigarh 160022

603843

Southern: C.I.T. Campus, IV Cross Road, CHENNAI 600113

254 19 84

Western: Manakalaya, E9, MIDC, Behind Marol Telephone Exchange,

2832 92 95

Andheri (East), MUMBAI 400093

Branch offices:

'Pushpak' Nurmohamed Shaikh Marg, Khanpur, AHMEDABAD 360001

560 13 48

Peenya Industrial Area, 1st Stage, Bangalore-Tumkur Road, BANGALORE

839 49 55

Commercial-cum-office Complex, opp. Dushera Maidan, Arera Colony,

242 34 52

Bittan Market, BHOPAL 462016

62/63, Ganga Nagar, Unit VI, BHUBANESHWAR 751001

240 3139

5TH Floor, Kovai Towers, 44 Bala Sundaram Road, COIMBATORE 641018

221 0141

SCO 21, Sector 12, Faridabad 121007

2292175

Savitri Complex, 116 G.T. Road Ghaziabad 201001

2861498

53/5 Ward No. 29, R.G. Baraua Road 5 by-lane, Apurba Sinha Path

2541137

GUWAHATI 781003

5-8-56C L.N. Gupta Marg, Nampally Station Road, HYBERABAD 500001

23201084

E-52. Chitrangan Marg, C-Scheme, JAIPUR 302001

2973879

117/418 B Sarvodaya Nagar, KANPUR 208005

2218774

Sethi Bhavan: 2nd Floor, Behind Leela Cinema, Naval Kishore Road,

2215698

LUCKNOW 226001

NIT Building, Second Floor, Gokulpat Market, NAGPUR 440010

2525171

Mahavir Bhavan, First Floor, Ropar Road, NALAGARH 174101

221451

Patliputra Industrial Estate, PATNA 800013

2262808

First Floor, Plot Nos 657-660, Market Yard, Gultkdi, PUNE 411037

4268659

"Sahajanand House" 3rd Floor, Bhaktinagar Circle, 80 Feet Road,

2378251

RAJKOT 360002

T.C. No. 14/1421, University P.O. Palayam, THIRUVANANTHAPURAM 695034

2322104

1st Floor, Udyog Bhavan, VUDA, Siripuram Junction, VISHAKHAPATNAM-03

2712833

Sales Office is at 5 Chowringhee Approach, P.O. Princep Street, Kolkata 700072

22371085

Sales Office is at Novelty Chambers, Grant Road, MUMBAI 400007

23096528